MLT Cable FRP Armoured

ID: **FF0I**

A-DQB2Y (FRP 1,0) 6×2,3 max. 72F

This cable is suitable for outdoor use. The cable is full dielectric, rodent protection and direct burial possible.

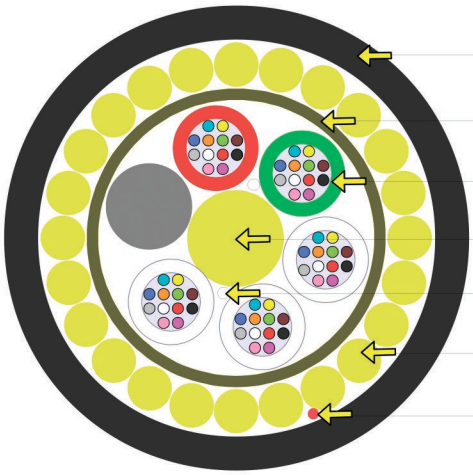

Black PE outer jacket, UV stable
(Other colours available on request)

Water-swellable tape

Gel filled loose tube with optical fibres

FRP dielectric central strength member (OD 2,5 mm)

Waterblocking yarn

FRP armouring (OD 1,0 mm cca. 27 ± 1 pcs.)

Ripcord

The picture represents a cable with 60 fibres

Mechanical and Environmental properties

Test		Value	Unit	Method
Cable outer diameter		12,1 ± 0,4	mm	EN 60811-1-1
Cable weight		134	kg/km	
Outer jacket thickness		1,3	mm	
Loose tube diameter		2,3	mm	
Max. tensile strength		6500	N	EN 60794-1-21-E1
Crush resistance test		4000	N	EN 60794-1-21-E3
Impact resistance test		3	Nm	EN 60794-1-21-E4
Min. bend radius (no load)		15	× OD	EN 60794-1-21-E11a
Min. bend radius (load)		20	×OD	EN 60794-1-21-E11b
Moisture resistance test		pass		EN 609794-1-22-F5
Temperature range	Installation	-15 to + 50	°C	EN 60794-1-22-F1
	Operation	-40 to + 70	°C	
	Storage	-40 to + 70	°C	

Cable life time - minimum 30 years

Fibre colour coding

According to IEC 60304

1	Red	7	Brown
2	Green	8	Violet
3	Blue	9	Turqoise
4	Yellow	10	Black
5	White	11	Orange
6	Grey	12	Pink

Other fibre colour sequences available on request

Tube colour coding

1	Red
2	Green
3 – 6	White

In the case of lower number of fibres some tubes are replaced by uncoloured fillers

Other tubes colour sequences available on request

Sheat Marking

Print colour	White
Print method	INK-Jet or Hot-foil
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Packing

Depending on ordered put-up lengths

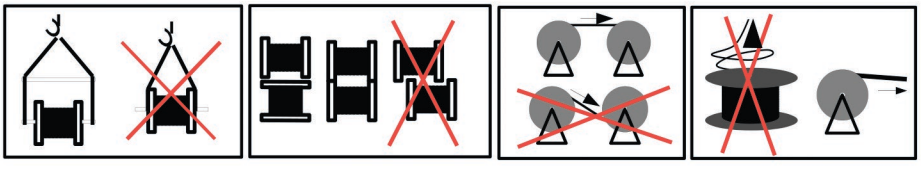

KDP reserves the right to change the values in this document without prior notice.KDP is not responsible for any action taken pursuant to this document.This document is property of KDP. This document or any of its parts are not alowed to be redistributed without explicit consent of KDP.