MLT Cable SWA Armoured

ID: **LWP2**

J/A-DQ2YBH (R1,0 vzk) 4×2,3 max. 48F

This cable is suitable for indoor or outdoor, direct burial possible.

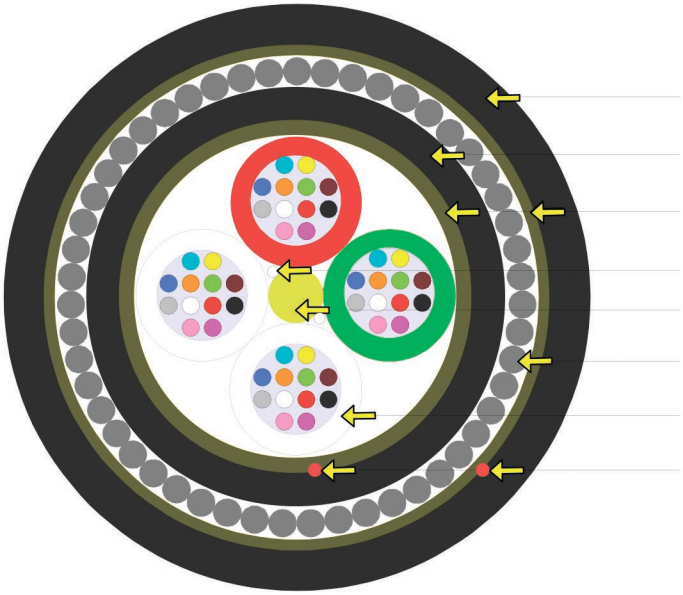

Black FR-LSZH outer jacket, UV stable
(Other colours available on request)

Black PE inner jacket, UV stable

Water-swellable tape

Waterblocking yarn

FRP dielectric central strength member (OD 1,0 mm)

Steel Wire Armouring (SWA)

Gel filled loose tube with optical fibres

Ripcord

Mechanical and Environmental properties

Test		Value	Unit	Method
Cable outer diameter		13,2±0,4	mm	EN 60811-203
Cable weight		305	kg/km	
Outer jacket thickness		1,4	mm	
Loose tube diameter		2,3	mm	
Max. tensile strength		4000	N	EN 60794-1-21-E1
Crush resistance test		4500	N	EN 60794-1-21-E3
Impact resistance test		25	Nm	EN 60794-1-21-E4
Min. bend radius (no load)		15	× OD	EN 60794-1-2-E11
Moisture resistance test		pass		EN 60794-1-22-F5
Temperature range	Installation	-15 to + 50	°C	EN 60794-1-22-F1
	Operation	-40 to + 70	°C	
	Storage	-40 to + 70	°C	

Cable life time - minimum 30 years

Fibre colour coding

According to IEC 60304

1	Red	7	Brown
2	Green	8	Violet
3	Blue	9	Turqoise
4	Yellow	10	Black
5	White	11	Orange
6	Grey	12	Pink

Other fibre colour sequences available on request

Tube colour coding

1	Red
2	Green
3 – 4	White

In the case of lower number of fibres some tubes are replaced by uncoloured fillers

Other tubes colour sequences available on request

Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Packing

Depending on ordered put-up lengths

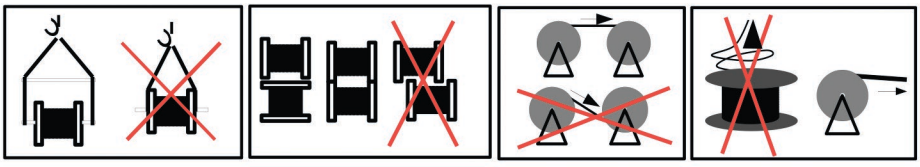

KDP reserves the right to change the values in this document without prior notice.KDP is not responsible for any action taken pursuant to this document.This document is property of KDP. This document or any of its parts are not alowed to be redistributed without explicit consent of KDP.